



• ROUGH TERRAIN TELEHANDLER • GTH™-4017 SX & GTH™-4017 EX

CHARACTERISTICS

Maximum lifting height with outriggers	mm	17.190
Maximum lifting height without outriggers	mm	16.720
Maximum forward reach	mm	13.330
Reach at maximum height	mm	3.560
Maximum lifting capacity	kg	4.000
Maximum lifting capacity at max height	kg	2.000
Maximum lifting capacity at max reach	kg	700
Unladen weight*	kg	11.600

PERFORMANCE

Min. outer turning radius	mm	4.650
Break out force	kg	6.000
Towing capacity at dynamometer	kg	3.590
Travel speed	km/h	28
Fork-holder plate rotation	°	138
Chassis levelling on the front axle	°	+/- 6
Floating forks	L 1.200 mm Section 120 x 50 mm	
Tyres (DIN 70361)	405/70-24" PR14 8 holes wheel disc	
Lifting / lowering speed	sec.	11/8
Extension / retraction speed	sec.	26/18

ENGINE



PERKINS 1104 D-44T

Power type	turbo diesel	
Rated horsepower	kW	74.5 (101 hp)
Number of cylinders	4	
Fuel tank capacity	L	150

*Weight depends on options

MAIN DIMENSIONS

A	Height	mm	2.440
B	Height at steering wheel	mm	1.600
C	Width	mm	2.320
D	Inside cab width	mm	780
E	Track	mm	1.920
F	Wheelbase	mm	2.950
G	Length at front wheels	mm	4.830
H	Length at fork-holder plate	mm	5.670
I	Ground clearance, centre	mm	430
L	Overall width (stabilizers extended)	mm	2.890
M1	Obstruction angle	°	40
M2	Departure angle	°	46

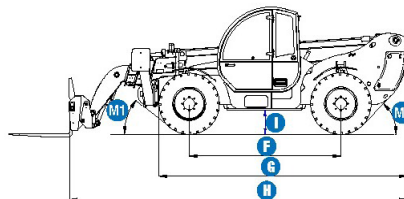



• ROUGH TERRAIN TELEHANDLER •
GTH™-4017 SX & GTH™-4017 EX

STANDARD FEATURES

MEASUREMENTS

- 4.000 kg maximum lifting capacity
- 17.190 mm maximum lifting height
- 13.330 mm maximum forward reach

PRODUCTIVITY

- 4 x 4
- 4-wheel steer
- 3 steering modes: front wheel steer / crab steer / coordinated steer
- Hydraulic line on boom
- Power assisted steering
- Front outriggers
- Hydrostatic transmission with variable displacement pump & motor
- GTH-4017 SX: mechanical 3x1 joystick / GTH-4017 EX: electro-proportional 4x1 joystick
- Limited slip differential on front axle
- Attachment holder place - mechanical coupling
- 2-section door (glass upper / steel lower)
- Angle & length indicators on boom correspond to load charts
- Adjustable suspended seat with operator detection seat contact switch
- Battery disconnection switch
- Large diameter steering wheel
- Front & rear windscreen wipers : Sunshield
- Roof protection grid
- Two side view mirrors & rear fisg eye mirror
- Front & rear lights
- Side mounted engine for easy access to components
- Oil immersed, multi-disc brakes on both axles / self activated parking brake hydraulically released
- Lockable fuel tank
- Maintenance collar
- Rear wheel alignment system
- Hydraulic inching by service brake pedal action
- Road / jobsite switch
- Stability & load control system: load moment indicator with LEDs, audible alarm and automatic lock-out of boom extension & lowering, of stabilisers and of rear axle

